

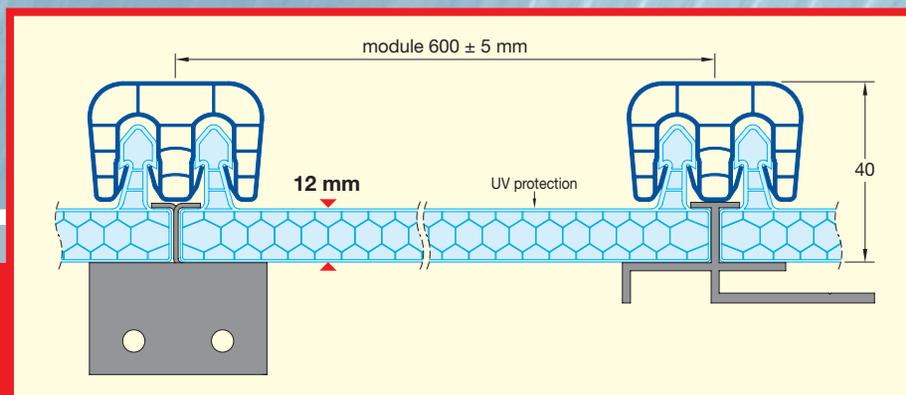


# SUN CLICK<sup>®</sup>

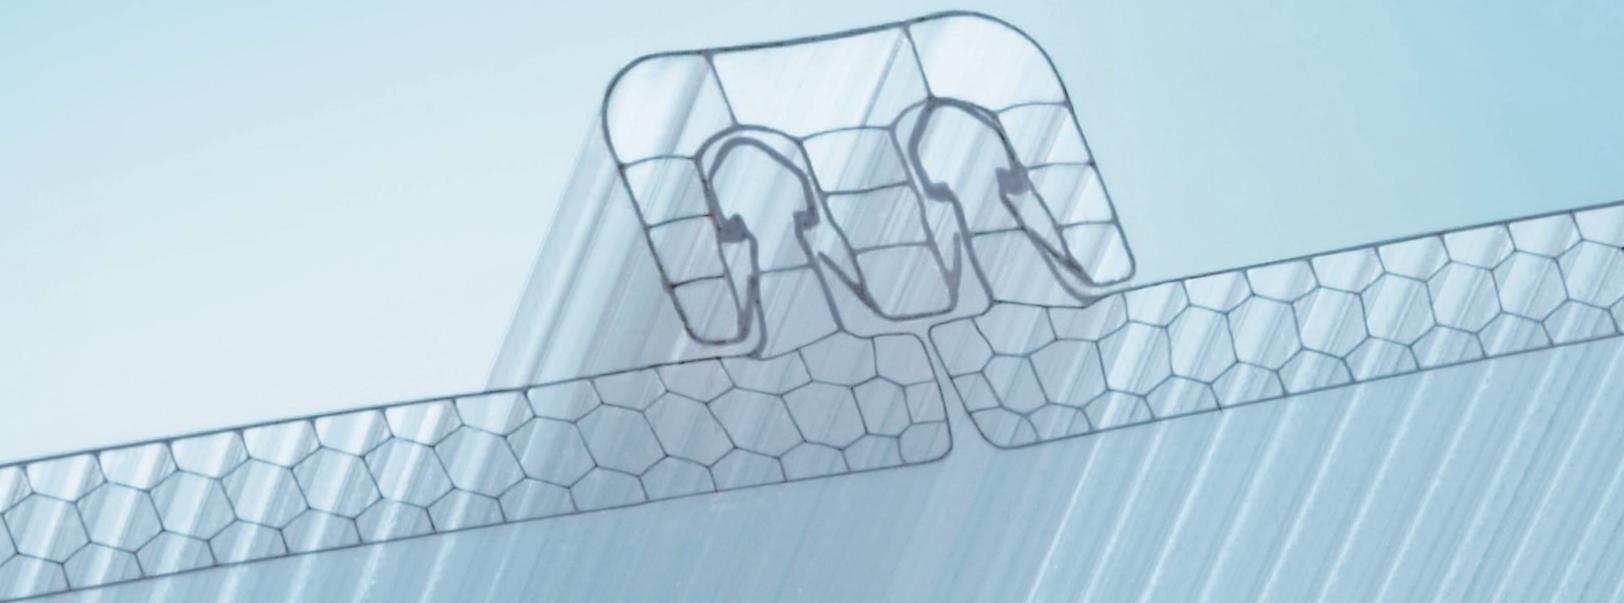


**TOP CONNECTOR SYSTEM  
IN CELLULAR POLYCARBONATE**

The modular system **SUN CLICK®** is particularly suited for small to medium-sized roofs, canopies and shelters. Due to the easy assembly it is especially convenient for DIY.

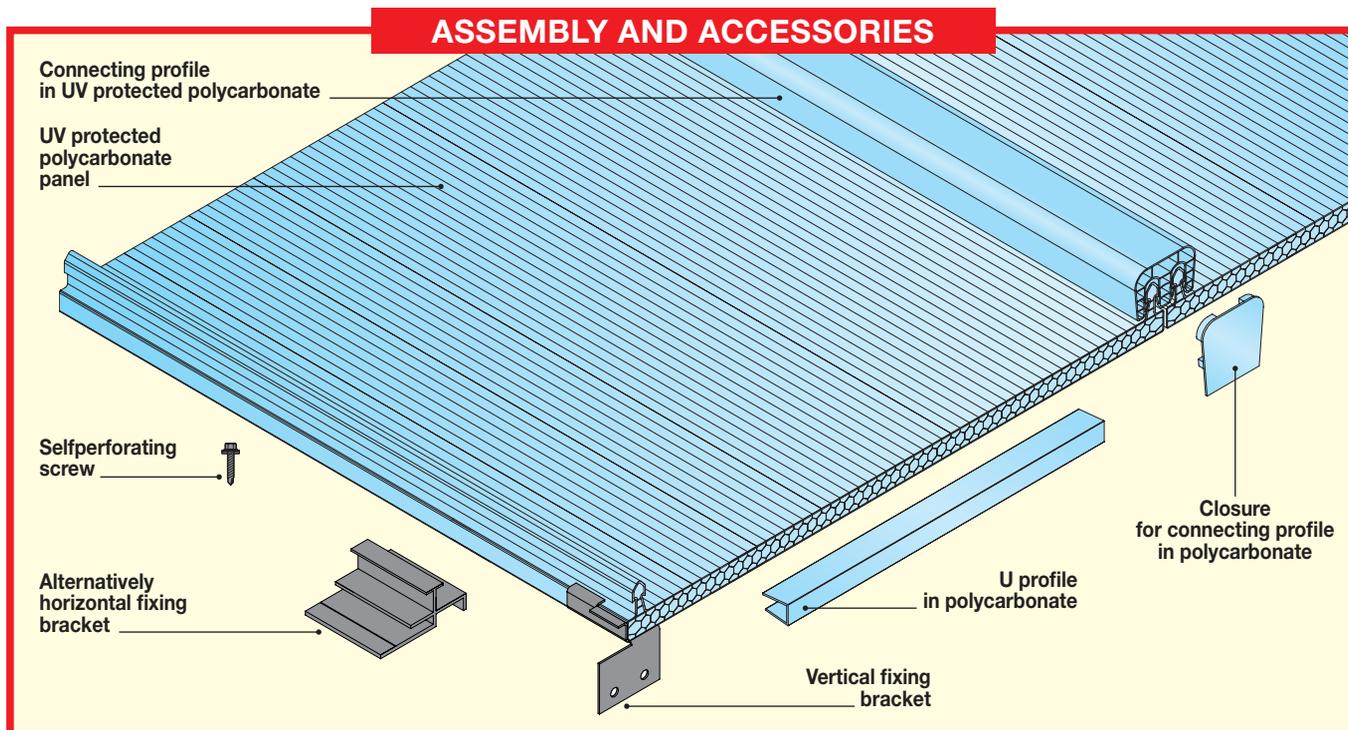

### CONNECTING PROFILE in POLYCARBONATE

The connection between two **SUN CLICK®** panels is effected with a connecting profile in polycarbonate, which is specifically developed to resist to compressive and depressive loads.

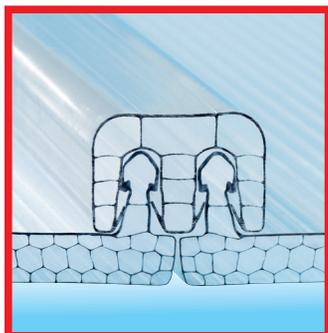

### WARRANTY

**SUN CLICK®** panels are protected against UV rays on the external side with coextrusion process. In Europe they are covered by a **10 YEAR WARRANTY** from the date of purchase against yellowing and weather damages (hail, etc.). For Extracountry Countries the warranty may have a different duration. For further details, please ask for the Warranty Certificate.

### CERTIFICATES

With regards to the fire performance, the **SUN CLICK®** panels are classified in Europe in European Fire Class EN 13501-1 B s1 d0. For further details please ask for copy of the respective certificate.

### MAINTENANCE

The sheets should not be stored without proper protection under the influence of sun and weather. It's recommended to clean the sheets regularly, in order to remove dirt due to dust and atmospheric pollution, using cold or lukewarm water and (if necessary) neutral detergents; don't use abrasive cloths, hot water and/or chemical detergents; avoid to clean the sheets if they are overheated by the sun.

### SPECIFICATION TEXT

**Glazing / flat roof / domed rooflight** with modular system **SUN CLICK®** by Akraplast Sistemi, in **total thickness 40 mm**, composed by: UV protected multi-wall polycarbonate panels, **modular width 600 mm, thickness 12 mm, honey comb structure, thermal insulation U = 2,25 W/m²K, colour transparent/opaline**; connecting profiles in UV protected polycarbonate for jointing of the panels with frontal engage, and possible accessories to complete the system.

TECHNICAL DATA	SUN CLICK	Unit
Panel thickness	12	mm
Modular width	600 ± 5 mm	mm
Number of walls	honey comb	no.
Panel length at request	max. 13500 mm	mm
Weight of the system	2,5	Kg/m²
Transparency: transparent	~ 64	%
opaline	~ 48	%
Thermal transmission [U]	2,25	W/m²K
Fire classification En 13501-1	B s1 d0	
Thermal expansion	0,065	mm/m K
Temperature ranganente	-40 / +120	°C

The values and recommendations given are to the best of our knowledge, true and accurate. Since the conditions under which the products may be used are beyond our control, recommendations are made without guarantee. These indications do not exempt the customer to make all controls to determine that the materials correspond to his requirements and to the laws in force.

**AKRAPLAST®** Sistemi S.p.A.

I - 20026 Novate Milanese (MI) - Via Cascina del Sole, 70  
Tel. (+39) 02 35 13 91 1 - Fax (+39) 02 35 13 91 50  
info@akraplast.com - www.akraplast.com



Organizzazione con Sistema di Gestione certificato Company with Management System certified

ISO 9001:2008

