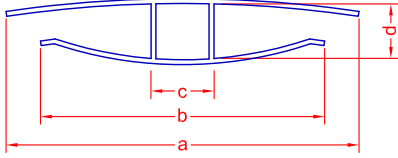






Profiles colour: transparent	For sheets thickness mm	Range			a mm	b mm	c mm	d mm	Lenght mm
		Not UVP	UVP	UVP 2-sides					
H 	4		●		68	55	12	5	6000
	6		●		68	55	12	7	6000
	8		●		85	71	13	9	6000
	10		●		85	71	13	11	6000
	16		●	●	103	92	19	17	6000
	20		●		114	96	20	27	6000
	25		●		114	96	26	27	6000
	30-32		●		129	111	33	33	6000
H-composed 	4-6-8-10		●		60	61	21		6000
U 	4	●	●		14	11		5	2100 / 6000
	6	●	●		14	11		7	2100 / 6000
	8	●	●		15	11		9	2100 / 6000
	10	●	●		16	14		11	2100 / 6000
	16	●	●		20	15		17	2100 / 6000
	20		●		25	20		22	2100
	25		●		26	23		27	2100
	30-32		●		32	27		33	2100

	Fixing Button			
	in Polyamide - colour white - screw \varnothing max 5,5 mm (not included)			
	for sheets thickness 6 mm		packages 100 pcs.	
	for sheets thickness 8-10 mm			
for sheets thickness 16 mm				

	Adhesive tape in aluminium		
	in Standard Aluminium:		
	M790	H = 25 mm for sheets thickness 4 - 6 - 8 - 10 mm	rolls 50 m.
	M791	H = 38 mm for sheets thickness 16 mm	
	M792	H = 50 mm for sheets thickness 25 mm	
	M793	H = 63 mm for sheets thickness 32 - 40 mm	
	in Aluminium with filter tape:		
	M799-38	H = 38 mm for sheets thickness 16 mm	rolls 33 m.
	M799-50	H = 50 mm for sheets thickness 25 mm	
M799-60	H = 63 mm for sheets thickness 32 - 40 mm		

GENERAL PROPERTIES of Polycarbonate	Thermal expansion	0,065	mm/m K
	Temperature range	-40 / +120	°C

Responsibility clause: all information and technical advice given are made in good faith and based on the best of our knowledge; but having no control over the use of their material, we accept no responsibility for their applications. These indications do not exempt the customer from its controls to determine compliance of materials and installation procedures to their needs and standards. AKRAPLAST Sistemi reserves the right to change specifications at any time.